



Laporte 185E Tahlb

The application site has 1 of these models.

Manufacturers Details

Clay magazine: 6C 200 or 12C 400.

Clay Targets: standard.

Re-cocking Time: 1.8 seconds.

Warranty: 3 years (consumable items exempt).

Throwing specification: As per regulations.

Power: 12v as standard.

PACKAGING:

Out of the box: supplied with 50 metre water resistant release cable.

Options: radio release, acoustic release, 12volt battery, 230v transformer.

Approx weight: 90kgs.

Approx height: .85m.




Supermatch One

The application site has 14 of these models.

Manufacturers Details

- Trap weight of 24Kg.
- Mini barrow weight of 7Kg.
- Includes two hoppers to hold 65 standard or midi clays, extendable to 100 with an extension hopper.
- Twin spring clay support system for extra stability.
- Wet clay separator.
- Hard wired circuitry with a 30 AMP fuse.
- Direct gear drive means no chain.
- No spanners required for elevation or spring tension.

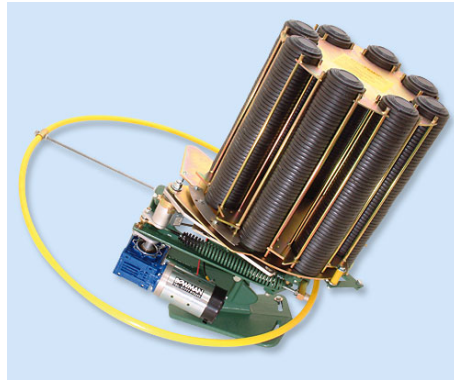

Supermatch Eight

The application site has 2 of these models.

Manufacturers Details

- Trap weight of 65Kg.
- Re-cocking time of 1.5 seconds.
- Heavy duty motor and gearbox.
- Slotted base for windage adjustment.
- Accurate and easy adjustment of arm parking.
- Thermal overload on/off de-cock and fire button, as well as hard wired circuitry.
- Hi-tensile aluminium arm.
- Long life bearings and seals.
- Three point clay lowering ramp.
- Sprung soft fall plate.
- Four different spring strengths available:
 - 150 metre throwing distance with red spring for a standard clay.
 - 135 metre throwing distance with a black spring for a standard clay.
 - 100 metre throwing distance with white spring for a standard clay.
 - 80 metre throwing distance with yellow spring for a standard clay.
- Unique multi-adjustable base with no spanners required for elevation or spring tension.
- Tilting option when fitted to a tilting base tilt of 40° to left and right.



185PC Rabbit Looper

The application site has 1 of these models.

Manufacturers Details

Clay magazine: 400 clays.

Clay Targets: rabbit or standard.

Re-cocking times: 1.8 seconds.

Warranty: 3 years (consumable items exempt).


Throwing specification: 40-110 meters depending on spring.

Power: 12v as standard.

Out of the box: supplied with 50 metre water resistant release cable, Reverse Rabbit kit.

Approx weight: 70kgs.

Approx height: 1.3m.

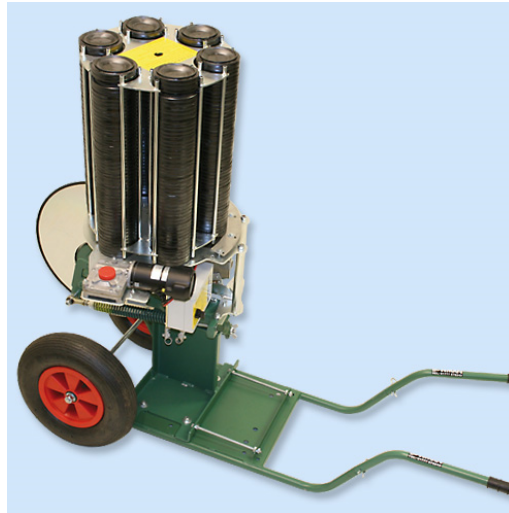


Supermatch Rabbit

The application site has 1 of these models.

Manufacturers Details

- Laser cut hi-tensile throwing arm
- Available in 12v DC
- No spanner required for spring tension adjustment
- 2 motors; 1 to cock the trap, 1 to index the carousel

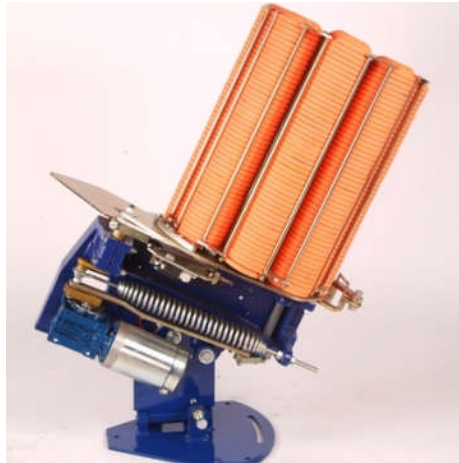


Super Sporter 8

The application site has 1 of these models.

Manufacturers Details

- Commercial ground and International Competition standard
- Available in an 8 or 10 stack model, 400-500 clay capacity
- Throwing distance of 118m +
- Max elevation up to 70 degrees
- Solid and robust heavy duty alloy body
- Near instant re-cocking time
- Midi (in 8 or 10), and Left – Handed (in Sporter 8) versions available
- 50m command cable with fire button included
- 3 year parts warranty
- Powered by a 12v battery (not included)

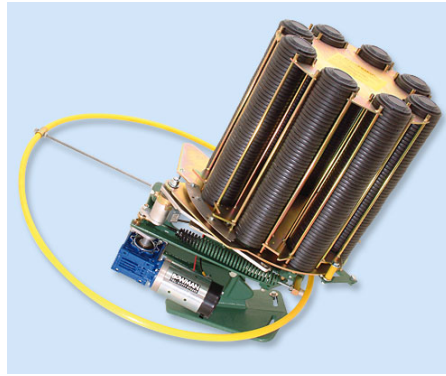

Supermatch Eight

The application site has 3 of these models.

Manufacturers Details

- Trap weight of 65Kg.
- Re-cocking time of 1.5 seconds.
- Heavy duty motor and gearbox.
- Slotted base for windage adjustment.
- Accurate and easy adjustment of arm parking.
- Thermal overload on/off de-cock and fire button, as well as hard wired circuitry.
- Hi-tensile aluminium arm.
- Long life bearings and seals.
- Three point clay lowering ramp.
- Sprung soft fall plate.
- Four different spring strengths available:
 - 150 metre throwing distance with red spring for a standard clay.
 - 135 metre throwing distance with a black spring for a standard clay.
 - 100 metre throwing distance with white spring for a standard clay.
 - 80 metre throwing distance with yellow spring for a standard clay.
- Unique multi-adjustable base with no spanners required for elevation or spring tension.
- Tilting option when fitted to a tilting base tilt of 40° to left and right.